


Isolating switches DX³-IS

from 16 A to 125 A

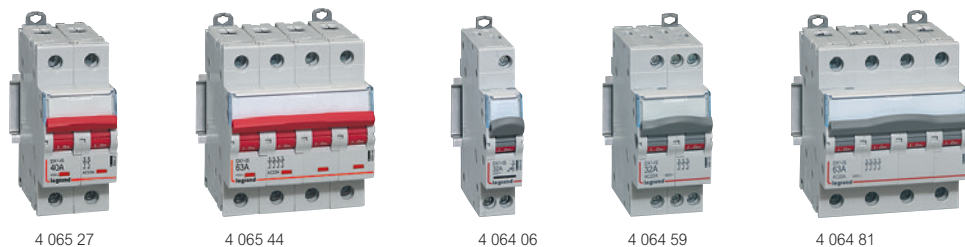

4 065 27

4 065 44

4 064 06

4 064 59

4 064 81

Dimensions **see e-catalogue**
Technical characteristics **p. 52**

AC 23 A according to IEC 60947 - 3, AC 22 A for 125 A
Double break contacts

Pack	Cat.Nos	Remote trip head isolating switches	
		Red handle Visible contact indication Remote tripping with associated control auxiliary (p. 64) Can be fitted with motorised controls and 2 DX ³ signalling auxiliaries (p. 64) Visual indication of the actual status of the contacts: - Closed position (red indicator) - Open position (green indicator)	
		2P - 400 V\sim	
		Nominal rating In (A)	Number of modules
1	4 065 27 ¹	40	2
1	4 065 28 ¹	63	2
		3P - 400 V\sim	
1	4 065 35 ¹	40	3
1	4 065 36 ¹	63	3
1	4 065 38 ²	100	4.5
1	4 065 39 ²	125	4.5
		4P - 400 V\sim	
1	4 065 43 ¹	40	4
1	4 065 44 ¹	63	4
1	4 065 46 ²	100	6
1	4 065 47 ²	125	6

Pack	Cat.Nos	Isolating switches - Red handle	
		Can be equipped with 1 DX ³ signalling auxiliary (p. 64)	
		2P - 400 V\sim	
		Nominal rating In (A)	Number of modules
5	N 4 064 55 ¹	100	2
		3P - 400 V\sim	
1	4 064 75 ¹	100	3
		4P - 400 V\sim	
1	4 064 95 ¹	100	4

Pack	Cat.Nos	Isolating switches - Grey handle	
		Grey handle Can be equipped with 1 DX ³ signalling auxiliary (p. 64)	
		1P - 250 V\sim	
		Nominal rating In (A)	Number of modules
10	4 064 00 ³	16	1
10	4 064 01 ³	20	1
10	4 064 03 ³	32	1
10	4 064 11 ¹	40	1
10	4 064 12 ¹	63	1
10	4 064 23	100	1
		1P with indicator - 250 V\sim	
		Supplied with lamp	
10	4 064 04 ³	20	1
10	4 064 06 ³	32	1
		2P - 400 V\sim	
10	4 064 31 ³	16	1
10	4 064 32 ³	20	1
10	4 064 34 ³	32	1
5	4 064 40 ¹	40	2
5	4 064 41 ¹	63	2
5	4 064 49	100	2
5	4 064 50	125	2
		2P with indicator - 400 V\sim	
		Supplied with lamp Do not accept auxiliaries	
10	4 064 36 ³	20	1
10	4 064 38 ³	32	1
10	4 064 39 ³	40	1
		3P - 400 V\sim	
5	4 064 57 ³	20	2
5	4 064 59 ³	32	2
1	4 064 60 ¹	40	3
1	4 064 61 ¹	63	3
1	4 064 69	100	3
1	4 064 70	125	3
		4P - 400 V\sim	
5	4 064 77 ³	20	2
5	4 064 79 ³	32	2
1	4 064 80 ¹	40	4
1	4 064 81 ¹	63	4
1	4 064 89	100	4
1	4 064 90	125	4

1: Compatible with prong-type and fork type supply busbars
 2: Can be equipped with add-on modules
 3: Compatible with prong-type supply busbars